

MODEL 1022 & 1025

INSTALLATION &

MAINTENANCE MANUAL

CONTROL CONCEPTS, INC. 2 YEAR LIMITED WARRANTY

CONTROL CONCEPTS, INC. warrants that the products delivered will be as described in the sales order or contract.

CONTROL CONCEPTS, INC. warrants to the original user that CONTROL CONCEPTS, INC. products will be free from defects in materials and workmanship for a period of two (2) years after the date CONTROL CONCEPTS, INC. ships such products.

If any CONTROL CONCEPTS, INC. product is found to be defective in material or workmanship during the applicable warranty period, CONTROL CONCEPTS, INC.'s entire liability, and purchasers sole and exclusive remedy, shall be the repair or replacement of the defective product at CONTROL CONCEPTS, INC.'s election. CONTROL CONCEPTS, INC. shall not be liable for any costs or expenses, whether direct or indirect, associated with the installation, removal or re-installation of any defective product. All shipping and freight costs are the responsibility of the customer. CONTROL CONCEPTS, INC.'s limited warranty shall not be effective or actionable unless there is compliance with all installation and operating instructions furnished by CONTROL CONCEPTS, INC., or if the products have been modified or altered without the written consent of CONTROL CONCEPTS, INC., or if such products have been subject to accident, misuse, mishandling, tampering, negligence or improper maintenance. Any warranty claim must be submitted to CONTROL CONCEPTS, INC. in writing within the stated warranty period.

CONTROL CONCEPTS, INC.'s limited warranty is made in lieu of, and CONTROL CONCEPTS, INC. disclaims all other warranties, whether expressed or implied, including but not limited to any IMPLIED WARRANTY OF MERCHANTABILITY, ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, any implied warranty arising out of a course of dealing or of performance, custom or usage of trade.

CONTROL CONCEPTS, INC. SHALL NOT, UNDER ANY CIRCUMSTANCES BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS, REVENUE OR BUSINESS) OR DAMAGE OR INJURY TO PERSONS OR PROPERTY IN ANY WAY RELATED TO THE MANUFACTURE OR THE USE OF ITS PRODUCTS. The exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict in tort, or any other legal theory, even if CONTROL CONCEPTS, INC. has notice of the possibility of such damages.

By purchasing CONTROL CONCEPTS, INC.'s products, the purchaser agrees to the terms and conditions of this limited warranty.

WARNING: The Control Concepts, Inc. power controllers use power thyristors to switch voltage to the connected load. Line voltage must be assumed at the output terminals at all times, even when the control signal has been removed and the load voltage appears to be off. It has been mandated by the National Electrical Code and the Occupational Safety and Health Act of 1970 that a physical disconnect be opened ahead of all remotely actuated controls before performing any maintenance work on the controller or its connected load.

PROPRIETARY DATA

© Copyright 2020, Control Concepts, Inc. Chanhassen, MN 55317

The information and design disclosed herein are the property of Control Concepts, Inc. and may not be used, reproduced or disclosed in any form except as granted in writing by:

CONTROL CONCEPTS, INC
8077 CENTURY BLVD
CHANHASSEN, MN 55317
PHONE: (952) 474-6200
TOLL FREE: (800) 765-2799
FAX: (952) 474-6070
www.ccipower.com

MODEL 1022 & 1025 TABLE OF CONTENTS

DESCRIPTION	1
SPECIFICATIONS	1
SPECIFICATIONS (Continued)	2
INSTALLATION	2
INSTALLATION DRAWINGS	3
INSTALLATION DRAWINGS (Continued)	4
MODEL 1022 CONNECTIONS	5
MODEL 1025 CONNECTIONS	5
ZERO AND SPAN ADJUSTMENTS	6
RECOMMENDED SPARE PARTS AND FUSES	6
REFERENCE DRAWINGS	6
TROUBLE SHOOTING	7
MANUFACTURED BY	7
MODEL NUMBER IDENTIFICATION	8
THEORY OF OPERATION	8

DESCRIPTION

The models 1022 and 1025 are single-phase phase-angle SCR power controllers. The controllers are the same except the 1022 accepts command signals of 0/5Vdc, 0/10Vdc or a potentiometer signal. The model 1025 accepts a 4/20mA command signal.

Both controllers control the RMS voltage to the load proportional to the command signal, independent of line voltage hanges. The controllers include soft-start and missing cycle detection which on power interruptions of one half cycle or more sets the load voltage to zero and then increases the load voltage to the desired voltage at a predetermined rate. This eliminates inrush currents that can occur due to loads with a low cold resistance or because of saturation when a transformer is used between the controller and the load.

The command signal is electrically isolated from line and load voltages and all are electrically isolated from the heat sink.

SPECIFICATIONS

CONTROL MODE:	Single-phase; Phase-angle; RMS value of the voltage applied to the load		
COMMAND SIGNAL:	SIGNAL		INPUT IMPEDANCE
	Model 1022	0/5 Vdc 0/10 Vdc Potentiometer (1K pot recommended, 20K permissible)	100K 200K 200K
	Model 1025	4/20 mA	200 Ohms
CONTROL RANGE:	6 to 97% of line voltage typical.		
LINEARITY:	RMS load voltage is linear within 2% of span of the command signal.		
ZERO AND SPAN ADJUSTMENTS:	User adjustable over range of +/- 20% of span.		
ISOLATION:	Dielectric strength input/line & load voltage/heatsink 4000V (RMS). Insulation resistance input/line & load voltage/heatsink 10^10 ohms. Maximum capacitance input to output 8pf.		
COOLING:	Convection		
MOUNTING:	Must be mounted on vertical surface with fins vertical. Unit may be mounted adjacent to each other. Heatsink is electrically isolated.		
LINE VOLTAGE:	120, 240, 480 or 575 Vac +10%, -20% 50/60 Hertz		
DIAGNOSTIC INDICATOR:	The intensity of an LED varies as a function of the command signal. Feature provides a quick and safe means to check controller operation.		
PHYSICAL:	Weight:	10 - 40 Amp 2 lbs	70 Amps 6 lbs
	Dimensions:	Refer to installation drawings.	
ENVIRONMENT:	Operating:	0 to 55° C (32 to 131° F)	
	Storage:	-40 to 80° C (-40 to 176° F)	
	Humidity:	0 to 95% Non-condensing	
DV/Dt AND TRANSIENT VOLTAGE PROTECTION:	200 volts/usec minimum A dv/dt snubber and a metal oxide varistor (MOV) are provided to protect against high frequency transients (dv/dt) and voltage spikes.		
DISSIPATION:	1.5 watt per amp of controlled current		
RECOMMENDED FUSING:	Special semiconductor fuses are not required. It is advised that the controller and load be protected with fast acting class 'T' fuses such as Bussmann type JJN (300V) or JJS (600V) fuses. Control Concepts maintains an inventory of fuses and fuse holders for your convenience. It is recommended that a fuse rated 120 to 125% of maximum load current be selected.		

SPECIFICATIONS (Continued)

SURGE CURRENT RATING				KW				
Continuous RMS rating	RMS 1 Second	Peak 1 Cycle (Non-Repetitive)	I ² t rating	120 Vac	240 Vac	277 Vac	480 Vac	575 Vac
10	22	140	81	1.20	2.40	2.77	4.80	5.75
20	40	250	260	2.40	4.80	5.54	9.60	11.50
30	80	625	1620	3.60	7.20	8.31	14.40	17.25
40	150	1000	4150	4.80	9.60	11.08	19.20	23.00
70	150	1000	4150	8.40	16.80	19.39	33.60	40.25

INSTALLATION

The controller must be mounted on a vertical surface such that the heat radiating fins are vertical and located in an environment that will not exceed 55°C and that is protected from dirt and dust.

The wiring must be per local electrical codes. The supply and load terminals will accept up to # 6 wire. The terminals for the circuit transformer and control signals accept wire up to # 14. The terminals for the control signals and circuit transformer are plug-in and may be removed by pulling perpendicular to the circuit card.

CAUTION:

1. The circuit transformer must be connected to the same supply as the controller and the load. A common installation error has been that of the circuit transformer being powered from a different phase or being connected across the SCR module rather than from the supply.
2. Do not over tighten the wire connections.

NOTE:

It is recommended that the controller and the load be protected with fast acting class "T" fuses such as described in the specification portion or this instruction manual.

RECOMMENDED TIGHTENING TORQUE USD CONNECTORS:		
WIRE SIZE (AWG)	TORQUE	
14 - 10 GA	35 IN-LBS	
8 GA	40 IN-LBS	
4 - 6 GA	45 IN-LBS	
2 - 3 GA	50 IN-LBS	

RECOMMENDED TIGHTENING TORQUE FOR GREEN CONNECTOR:		
WIRE SIZE (AWG)	TORQUE	
12 TO 26GA	5.0 IN-LBS	

INSTALLATION DRAWINGS

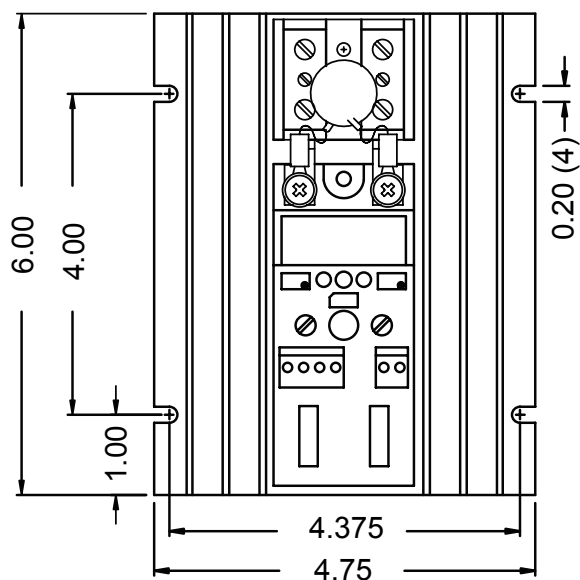


Figure 1. 10, 20, 30 & 40 Amp.

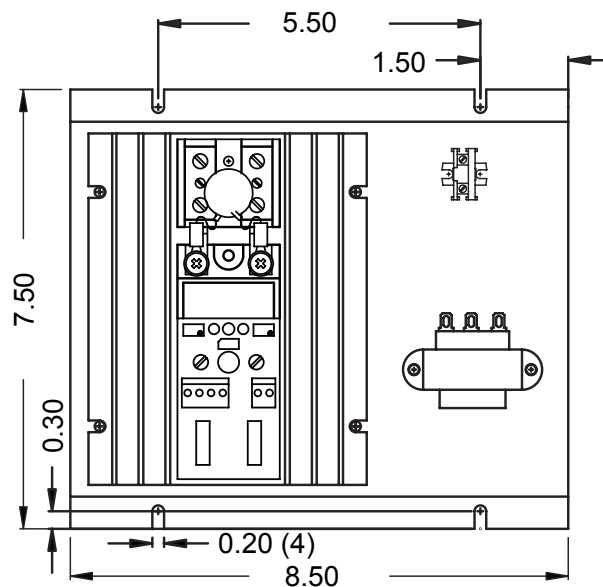


Figure 2. "-MO1" Mounting Option.

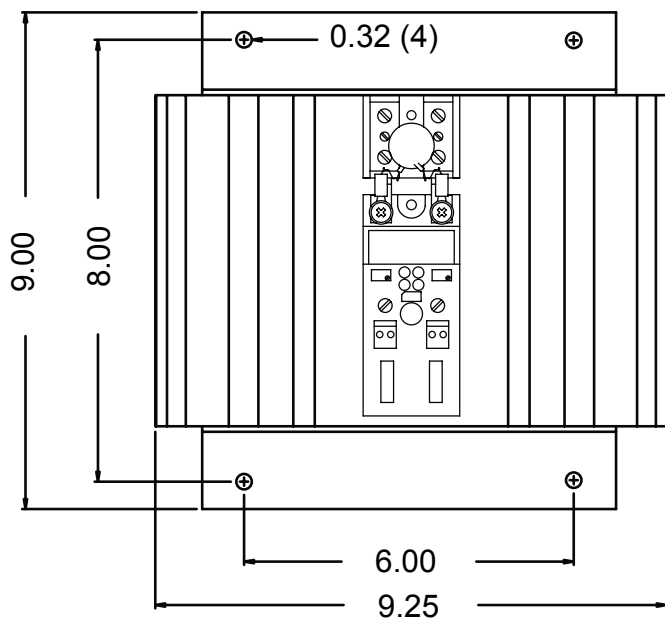


Figure 3. 70 Amp.

INSTALLATION DRAWINGS (Continued)

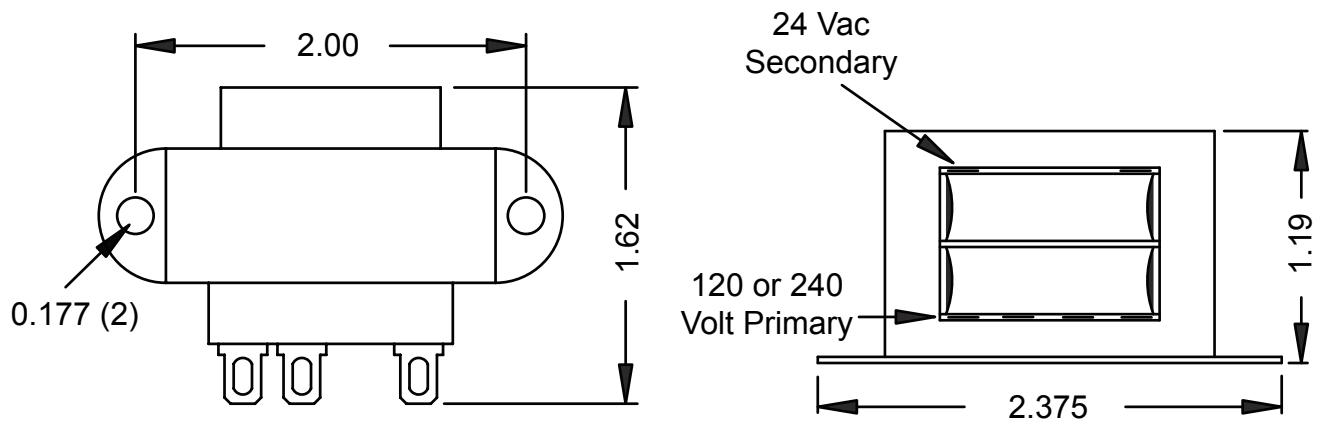


Figure 4. 120/240 Volt Primary Transformer.



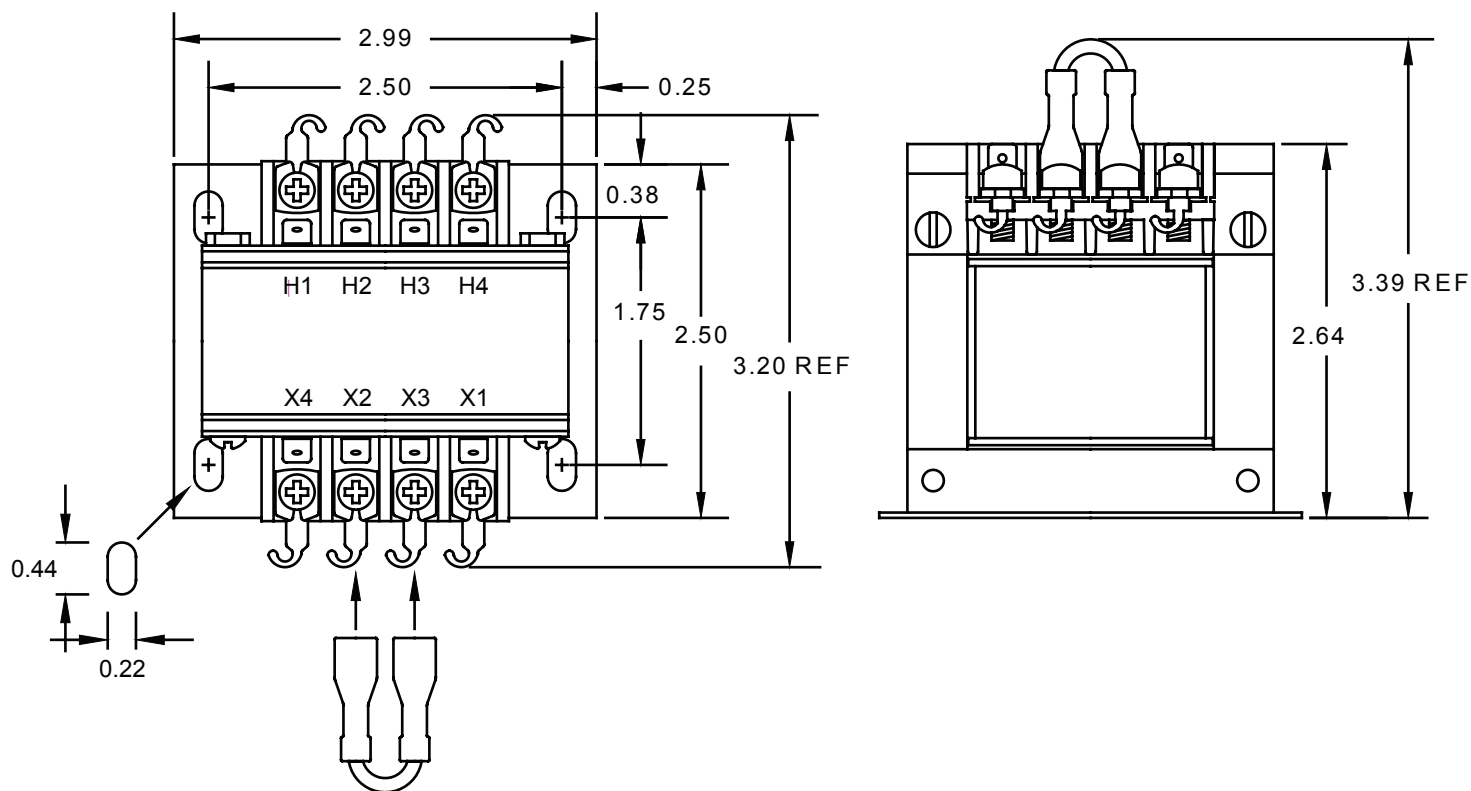


Figure 5. 480 Volt across H1 and H4 of Primary.
Jumper across X2 and X3 to create 24 Vac on Secondary.

MODEL 1022 CONNECTIONS

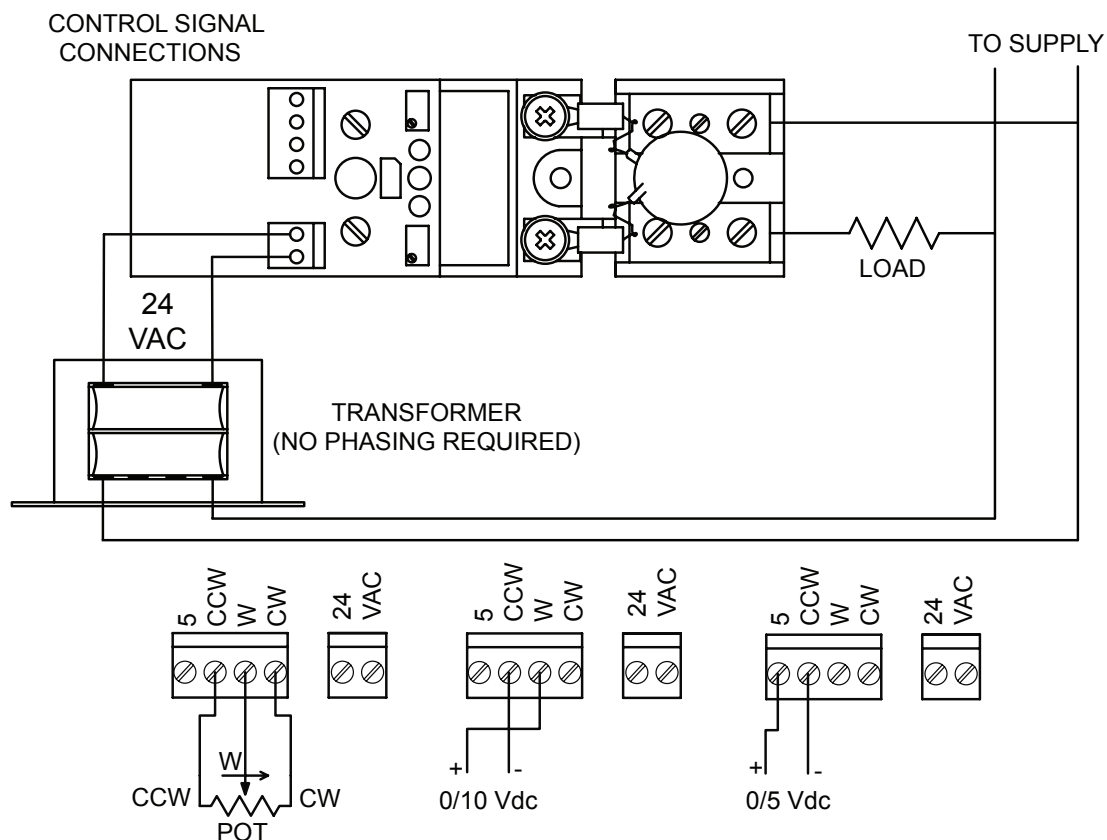

MODEL 1025 CONNECTIONS

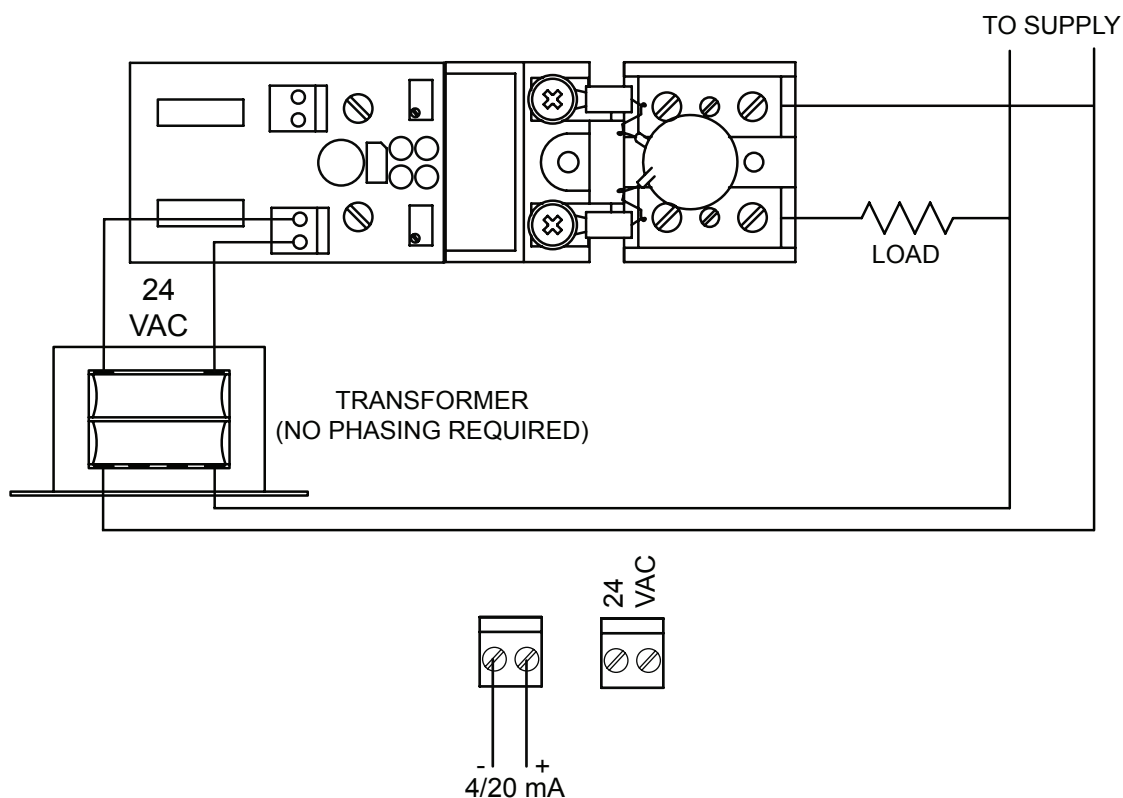

ZERO AND SPAN ADJUSTMENTS

The zero and span adjustments have been factory adjusted to provide zero load voltage when the minimum command signal is applied and to provide rated output voltage to the load when the maximum command signal is applied. Further adjustment of these settings should not be required. If it is desired to readjust the zero and span settings the following procedures should be followed.

Voltage and/or current measurements should be taken with meters that provide true RMS readings due to the chopped waveforms provided by the SCR controller. Adjust the zero potentiometer with the minimum command signal applied such that the load voltage is just zero. (Clockwise rotation of both the span and zero potentiometer increase the load voltage) Adjust the span potentiometer with the maximum command signal applied such that load voltage equals the rated voltage of the controller. It may be necessary to repeat these steps due to interaction that can occur.

NOTE The 1022 and 1025 controllers have line voltage compensation therefore if the supply voltage is above the nominal rating the controller will supply the nominal rated voltage to the load.

For example, if a controller rated for 240 volt operation is supplied from a 260 volt supply and the maximum command signal is applied the controller will supply only 240 volts to the load thereby eliminating the effects of line voltage changes.

RECOMMENDED SPARE PARTS AND FUSES

RECOMMENDED REPLACEMENT SCR:		RECOMMENDED FUSES (typical) (Alternative fuse size is 125% of maximum load current)		
MODEL:	ASSEMBLY PART No. *	CCI PART No.	BUSSMAN PART No.	CCI FUSEKIT **
1022-12-10 OR 1025-12-10	1652-12-10	42110-0460-315	JJS-15	FK\62T15
1022-12-20 OR 1025-12-20	1652-12-20	42110-0460-325	JJS-25	FK\62T25
1022-12-30 OR 1025-12-30	1652-12-30	42110-0460-335	JJS-35	FK\62T35
1022-12-40 OR 1025-12-40	1652-12-40	42110-0460-350	JJS-50	FK\62T50
1022-12-70 OR 1025-12-70	1652-12-70	42110-0460-390	JJS-90	FK\62T90
1022-24-10 OR 1025-24-10	1652-12-10	42110-0460-315	JJS-15	FK\62T15
1022-24-20 OR 1025-24-20	1652-12-20	42110-0460-325	JJS-25	FK\62T25
1022-24-30 OR 1025-24-30	1652-12-30	42110-0460-335	JJS-35	FK\62T35
1022-24-40 OR 1025-24-40	1652-12-40	42110-0460-350	JJS-50	FK\62T50
1022-24-70 OR 1025-24-70	1652-12-70	42110-0460-390	JJS-90	FK\62T90
1022-48-10 OR 1025-48-10	1652-48-10	42110-0460-315	JJS-15	FK\62T15
1022-48-20 OR 1025-48-20	1652-48-20	42110-0460-325	JJS-25	FK\62T25
1022-48-30 OR 1025-48-30	1652-48-30	42110-0460-335	JJS-35	FK\62T35
1022-48-40 OR 1025-48-40	1652-48-40	42110-0460-350	JJS-50	FK\62T50
1022-48-70 OR 1025-48-70	1652-48-70	42110-0460-390	JJS-90	FK\62T90

* The assembly includes the SCR relay, a thermal conductive pad, an MOV and an instruction sheet.

** The fuse kit includes two fuses of appropriate rating for the frame size, and a fuseblock. Control concepts recommends that fuses be rated at 120 to 125% of maximum load current.

REFERENCE DRAWINGS

Model 1022 Schematic: B1000466
Model 1025 Schematic: B1000324

Transformer Inst. Dwg. AS1401

MODEL NUMBER IDENTIFICATION

102X-VV-AA [-SCXXX] [-MOXX]

X = 2 for 1022, _____
 5 for 1025
 1022 (0/5Vdc, 0/10Vdc or POT control)
 1025 (4/20mA input)

VV = Rated voltage: _____

12 = 120Vac
 24 = 240Vac
 48 = 480Vac
 57 = 570Vac

AA = Rated amps: _____
 10, 20, 30, 40, or 70 amps

Note:

The addition of "-SCXXX" implies that the controller has been modified to have a different input command. For example, a "-SC1/5Vdc" implies the controller has been modified to operate with a 1/5Vdc control signal.

The addition of "-MOXX" implies a special mounting or assembly of the controller.

THEORY OF OPERATION

The model 1022 and 1025 are phase-angle controllers, therefore, the load voltage is controlled by turning the appropriate SCR on for a portion of each electrical half cycle as shown in Figure 6. The waveform shown as E_L represents the "ON" time of the SCRs in each half cycle and therefore represents the voltage waveform applied to the load. As the load voltage is increased the SCRs are turned ON earlier in the cycle. As the load voltage is decreased the SCRs are turned on later in cycle. The load voltage can be varied with infinite resolution from 0 to 100 percent of the line voltage. Circuit tolerances may limit the maximum load voltage to about 97% of the supply voltage.

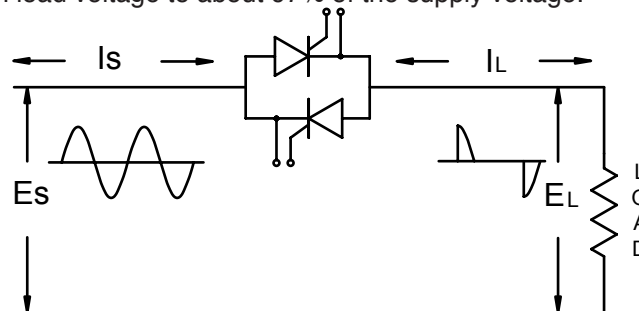


Figure 6. Phase angle control at 50% power.

TROUBLE SHOOTING

CAUTION: High voltage exists on the supply and load terminals of this controller and may exist on other equipment located near the controller. Use extreme caution to avoid electrical shock.

The LED located on the controller circuit can be used to aid in determining problems. This LED varies in intensity proportional to the command signal and therefore should be proportional to the load voltage.

THE FOLLOWING ARE SYMPTOMS AND POSSIBLE CAUSES:

SYMPTOMS	POSSIBLE CAUSES
NO LOAD POWER, LED not ON:	Determine that the command signal is applied to the controller. Determine that 24 volts is applied to the circuit.
NO LOAD POWER, LED intensity can be varied:	Determine that all fuses are "OK". If the voltage across the SCR module is equal to the line voltage the SCR module has probably failed. NOTE: If a replacement SCR module is ordered specify the voltage and current rating of the controller and the serial number of the failed unit.
LOAD POWER IS MAXIMUM AND CANNOT BE REDUCED, LED is ON:	Determine that the command signal can be adjusted to zero. Also remove the green plug-in connector to remove the command signal. If the LED is not off, the circuit card has failed.
LOAD POWER IS MAXIMUM AND CANNOT BE REDUCED, LED is OFF:	Remove the 24Vac plug in connector. If the load still has power the SCR module has probably failed as a short allowing full power at be applied to the load. To determine if the SCR module has shorted remove power and then the line and load connections and measure the resistance across the line and load terminals on the SCR module. If the resistance is less than 10000 ohms the modual has failed. NOTE: If a replacement SCR module is ordered specify the voltage and current rating of the controller and the serial number of the failed unit.
LOAD VOLTAGE SNAPS ON:	Determine that the primary of the circuit transformer is connected to the same supply as the controller and load.
MAXIMUM LOAD VOLTAGE CANNOT BE OBTAINED:	Determine that the primary of the circuit transformer is connected to the same supply as the controller and load. Typically this problem is caused by the primary being connected across the load and line connection at the controller.

MANUFACTURED BY



TEL: (952) 474-6200 (800) 765-2799
FAX: (952) 474-6070 www.ccipower.com

8077 Century Blvd
Chanhassen, MN 55317, USA